

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/053526 A1

(51) International Patent Classification⁷: G01V 1/16, 1/38

(74) Agent: CURO AS; Box 38, N-7231 LUNDAMO (NO).

(21) International Application Number:
PCT/NO2003/000408

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 8 December 2003 (08.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20025896 9 December 2002 (09.12.2002) NO

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): SEABED
GEOPHYSICAL AS [NO/NO]; Transittgata 11, Box
5143, Lademoen, N-7447 Trondheim (NO).

(72) Inventor; and


(75) Inventor/Applicant (*for US only*): BERG, Eivind
[NO/NO]; Vaeretrøa 75, N-7054 Trondheim (NO).

Published:

— with international search report

[Continued on next page]

(54) Title: SENSOR ARRANGEMENT FOR SEISMIC WAVES

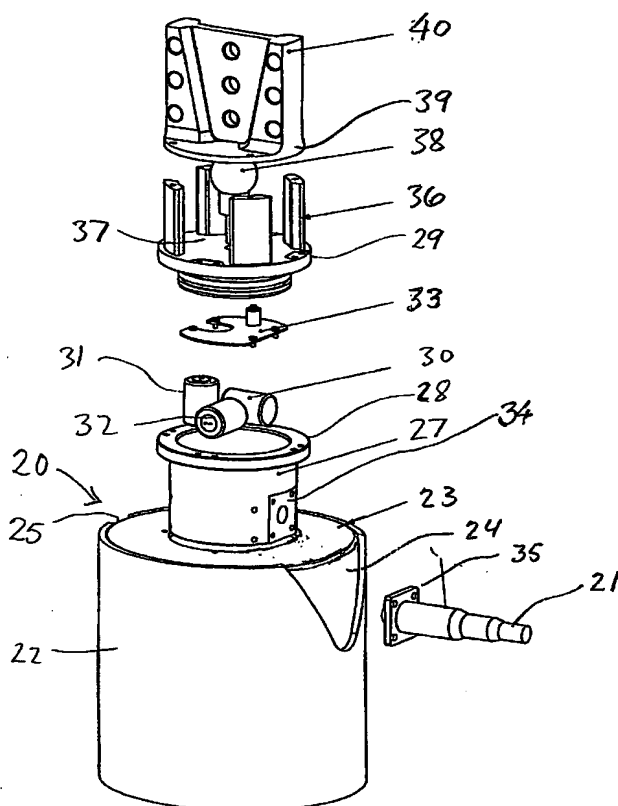

(57) Abstract: Sensor arrangement for use in the seismic investigation of geological formations below the seabed, with a plurality of sensor nodes (20), which are arranged for deployment on the seabed to collect pressure waves and shear waves from the geological formations, and to transfer seismic data to a surface receiver. Each sensor node (20) comprises a mainly cylindrical structure (22), which is intended to penetrate down into the seabed. A geophone (30-32) is arranged in connection with this structure (22). An advantageous method for operating a seismic mapping system with sensor arrangements orderly deployed on the seabed, records data concerning system behaviour and seismic data, the data of which is to be further processed separately.

WO 2004/053526 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Sensor arrangement for seismic waves

The invention relates to a sensor arrangement as indicated in the introductory part of claim 1, for receiving seismic waves, which are reflected from geological formations below the seabed, on
5 which seabed a plurality of sensor nodes are placed, preferably in an orderly manner. In addition, it comprises a method of managing a seismic mapping system.

Background

For sensing seismic pressure waves, and shear waves in particular, the sensor nodes must, in
10 principle, be in contact with a solid medium. In a marine offshore environment, this implies collecting this kind of data on the seabed, in contact with the subsea sediments. In this context, shear waves or converted seismic waves have other characteristics for describing formations and hydrocarbon reservoirs, than the traditional pressure waves alone. In a marine context, pressure waves are traditionally collected by using hydrophone sensor cables, being towed behind a
15 vessel that also expels regular pressure pulses from air guns.

In a marine context, shear waves and converted shear waves are usually obtained by generating pressure waves with a pressure pulse from air guns at a surface vessel. When such pressure waves strike the seabed and the various geological interfaces in geological formations below the
20 seabed, some of the pressure wave energy will transform into reflecting shear wave energy or converted shear waves, which are absorbed in sensor nodes that are deployed down into the seabed. Since water does not have shearing strength, it cannot carry shear waves, as can solids.

To obtain mapping value of the geological formations, the sensor nodes must be placed in organized matrix patterns in large numbers on the seabed, so that the reflected pressure waves and
25 converted shear waves together can contribute to an accurate image of the geological seabed formations. In this context, an image signifies a geometric three-dimensional representation, which gives information on petrophysical characteristics of geological reservoir formations and the fluid content of these.

30

Of known systems, there are mainly two types; so-called "OBS" or individual seabed seismometers and multiple component seabed cables. OBS-units are dropped from the surface and sink freely down onto the seabed. The geophones are placed on the inside of a glass ball, while the hydrophone is placed on the outside. A release mechanism makes the glass balls with

geophones, hydrophone, collection electronics and collected data float up to the surface, where they are collected. An iron frame platform is left on the seabed. OBS is used for rough geological mapping based on seismic refraction.

- 5 Multiple component seabed cables normally comprise three-component geophones with gimbal suspension and hydrophones lying inside and along a cable, or in windings of a cable. The cables are laid or rolled down onto the seabed by dynamically positioned vessels on the surface, but in some cases they can be pulled along the seabed. The collection of pressure- and shear wave reflection data occurs with the same method as with surface cables.

10

Object

The main object of the invention is to provide a sensor arrangement, which combines the demands for reliable and detailed registrations, i.e. absorption of reflected seismic waves of an area, with the request for equipment that is easy to place on the seabed.

15

Another object is to provide a sensor arrangement with a sensor element, which can be lowered into the sediments on the seabed and which is unaffected by a support and control unit, while ensuring directional sensitivity, independent of the position. The sensor arrangement should be small, compact and light. Additional objects of the invention appear from the example

20 description.

The invention

The invention is stated in claim 1, whereas claims 2-11 state particularly advantageous features of the invention. The invention further comprises a method for operating a seismic mapping
25 system, as stated in claim 12.

Further details of the invention will become apparent from the following example description.

Example

- 30 The invention is described below in more detail, with reference to the drawings, in which
- Fig. 1 is an exploded perspective view of a sensor arrangement according to the invention, with a sensor node in connection with a control unit,
- Fig. 2 is an exploded perspective view of an embodiment of a sensor node, and

Fig. 3 is a schematic perspective view, which illustrates the placing of a number of sensor nodes in a squared pattern, and how a wave generated from the surface is reflected towards a node from a geological formation below the seabed.

5 Fig. 1 shows a control unit 11 with a cigar-shaped housing 12 placed onto a pair of runners 13 with a bend in both ends. The cigar-shaped housing 12 has a cylindrical central part 14 with end flanges, and two hemispherical shaped end-domes 15 attached to the end flanges. The housing 12 is attached to two opposed, divided supports 16A and 16B, which on the upper side are joined with a rail 17 that holds a gripping bow 18. With this gripping bow, the control unit 11 can be
10 lowered down onto the seabed at defined positions. This will be described below.

The control unit 11 contains a computer with a storage medium, clock, telemetry system and batteries. It makes continuous recording of seismic data with a given sampling frequency possible. Hydroacoustic communication makes it possible to collect control data from saved seismic data
15 on a hard disk, at discreet points in time. Only data chosen in advance is recorded by telemetry, and this data consists of two types: 1) system data and 2) seismic data, which are processed further. System data can be information about battery status, data storage volume and tiltmeter data. While cable connection has limited capacity for data transmission and quality control, the transmission capacity is now limited and the need for good methods and routines for quality
20 control has increased.

Further, Figure 1 shows a sensor node 20, which is connected to the control unit 11, with an acoustic insulated cable 21, i.e. a cable, which cannot transfer mechanical vibrations. The sensor node 20 can be carried together with this during the deployment, as will be described below. In
25 Fig. 1, a transducer 19 is also shown, for transmission of data.

Fig. 2 shows a more detailed example of a sensor node 20, which provides a sensor system. The sensor node 20 includes a lower main part or skirt, a geophone housing with three geophones, a tiltmeter that measures angle in relation to the coordinates X and Y, a hydrophone and a grip
30 element for a ROV. These parts will be described below in more detail.

The lower main part comprises a cylindrical skirt 22, which at its upper part is terminated with a plate ring 23 that is fixed, for instance by welding, so that it has the shape of an inverted bucket

with an opening in the bottom. A skirt 22 with a shape that deviates from an ideal cylindrical shape, for instance a multiangular and/or slightly tapered shape, can also be used.

The skirt 22 in the example is cylinder shaped for being direction insensitive with regard to seismic waves, and simultaneously for achieving a good coupling to the seabed sediments. Because of the thin walls of the skirt 22, the skirt will cause small mass movement, but simultaneously have a large contact area against the sediments on both sides (inside and outside). The skirt can advantageously be of aluminum, for achieving optimal contact/binding. Aluminum binds well to clay minerals in the sediments.

10

The diameter and the length of the skirt can be of the same dimension for instance 200 mm, with a wall thickness of 5 mm. A V-shaped outlet 24 is made in the upper edge of the skirt 22, partly for giving space to the cable 19, and partly for letting out sediments and water when deploying. On the diametrically opposed side, there is a notch 25 in the edge of the skirt 22 for ensuring sediment discharge.

15

In the upper part of the cylindrical shaped skirt 22, and attached to the plate ring 23, there is placed a geophone housing 27 of cylindrical shape and an upper flange 28 for a cover 29. In the geophone housing 27, there are placed three component-geophones 30, 31, 32, which are positioned with a 90° angle in relation to each other, and a coupling card 33 with electric components and couplings. The geophone housing 27 has an attachment plate 34 for the cable connection 35, with an opening for the cable 21.

20

On the cover 29, four upwardly projecting poles 36 are evenly distributed at the outer edge, and define a cage 37 for a hydrophone 38. The hydrophone 38 measures pressure changes right above the geophone housing 27, for instance 10-15 cm above the seabed, in pure water zone. It shall not have sediments surrounding it.

25

A plate 39 is mounted above the poles 36, which carries an upwards projecting grip 40, for a gripping tool on a remotely operated vehicle (ROV). The sensor node 20 can in this way be deployed from a remotely controlled vehicle with a general arm or by making a special deployment tool (ROT) for deploying the sensor node. This is in particular relevant in shallow waters, with a depth of some tens of meters.

30

- The skirt 22 is lowered into the seabed sediments, so that the lower part of the geophone housing 27 has a good connection to the surrounding sediments. The skirt 22 ensures a minimal change in the sediment characteristics, as little sediment mass is relocated during deployment. This makes the skirt-design suited to both a hard and a soft seabed. The coupling of the skirt 22 to the upper 10-50 cm of the seabed sediments represents the geophone coupling to the sediments just below the seabed. The skirt is lowered down to the lower part of the geophone housing if the seabed is hard, or down to the upper part of the skirt if the seabed is softer (upper edge of the skirt).
- 10 The sensor nodes 20 are then deployed as vertically as possible (less than 5 degrees off vertical). The direction/heading (compass direction) in relation to north is measured from the ROV. This makes it possible to conduct a full rotation in relation to measured data. This is much more accurate.
- 15 Under extreme conditions with considerable current on the seabed, the control unit can be provided with extra weights and spikes that extend into the seabed, so that it is held in position. (Experience with the aforementioned is in 4 knots current at a river mouth).

For large water depths towards 2000-3000 m, the control unit 11 must be modified for such depths. The rest of the sensor node 20 can remain the same.

Fig. 3 shows an example of an arrangement with several sensors in a matrix pattern on the seabed 41, where each sensor node 20 is connected to its own control unit 11. In this way, it is possible to map the pressure wave reflections 42 and the shear wave reflections 43 in a sheet pattern. On the basis of this, with appropriate signal processing, one can draw conclusions about the geological formations below the seabed including the fluid content, among other things. A typical distance between the sensor nodes 20 can be 300-500 m. Numeral 44 indicates a vessel that generates seismic waves 45.

- 30 The sensor node 20 shall, in principle, be small, compact, and light weight. Its specific weight may be the same or less than the specific weight of the sediments in which it is deployed. The size and shape of the skirt can be adapted to various seabed conditions. The skirt 22 and the grip 40 of the ROV are modular and can easily be replaced with corresponding parts with different

size and shape. Manufacturing the skirt in aluminum yields particularly good contact to the sediments in the seabed.

When the sediments are hard, the shape of the skirt 22 can be altered by reducing the skirt length and increasing its diameter, to achieve the best possible coupling. When the bottom is rough or particularly hard, the lower part of the skirt may have teeth to achieve a better contact to the seabed sediments, where appropriate.

For soft seabed sediments, it is appropriate to increase the skirt's diameter and possibly also its length, to achieve the best possible coupling. In any case, the sensor nodes 20 shall have the lowest possible centre of gravity, i.e. the centre of gravity should be on or, even better, below the seabed level. The weight of the sediments inside the skirt is included when determining the centre of gravity. The shape of the skirt ensures a stable coupling of the sensor node to the seabed, even with some lateral variation of the sediments along the bottom.

15

As an alternative to the skirt 22 of plate material, a ring layout of poles, with or without spaces, can be used.

Claims



1. Sensor arrangement for use in seismic investigation of geological formations below the seabed, with a plurality of sensor nodes (20), which are arranged for deployment on the seabed to acquire pressure waves and shear waves from the geological formations and to transfer seismic data to a surface receiver, **characterized in** that each sensor node (20) comprises a mainly cylindrical structure (22), which is intended to penetrate down into the seabed, and in that there is arranged a geophone (30-32), which is connected to this structure (22).
2. Sensor arrangement according to claim 1, **characterized in** that the cylindrical structure is a skirt (22).
3. Sensor arrangement according to claim 1, **characterized in** that the cylindrical structure is a ring layout of poles, with or without spaces.
4. Sensor arrangement according to any one of the claims 1-3, **characterized in** that a housing (27) that encloses at least one geophone (30-32), is arranged at the top of the skirt (22) of the sensor node (20).
5. Sensor arrangement according to claim 4, **characterized in** that an open cage (37), which encloses at least one hydrophone (38), is arranged above the housing (27), which encloses a geophone.
6. Sensor arrangement according to any one of the claims 1-5, **characterized in** that a grip (40) for a remotely operated underwater vehicle (ROV) or -tool (ROT) is fixed at the top.
7. Sensor arrangement according to claim 4, **characterized in** that the housing (27) encloses three geophones (30-32), which are positioned with a 90° angle in relation to each other, and a tiltmeter.
8. Sensor arrangement according to any one of the claims 1-7, **characterized in** that the sensor node (20) is connected to a control unit (11) through an acoustic insulated cable (21).
9. Sensor arrangement according to claim 8, **characterized in** that the cable (21) is led into the sensor node (20) through the upper part of the skirt (22), or similarly.

10. Sensor arrangement according to any one of the claims 1-9, **characterized in** that the cylindrical structure, which is intended to penetrate down into the seabed, is manufactured in aluminum.

11. Sensor arrangement according to any one of the claims 1-10, **characterized in** that the hydrophone (38) is placed in the order of 10 cm above the geophone (30-32).

12. Method for operating a seismic mapping system with sensor arrangements orderly deployed on the seabed, **characterized in** that data concerning system behaviour and seismic data, which are to be processed further, are recorded by telemetry.

1/2

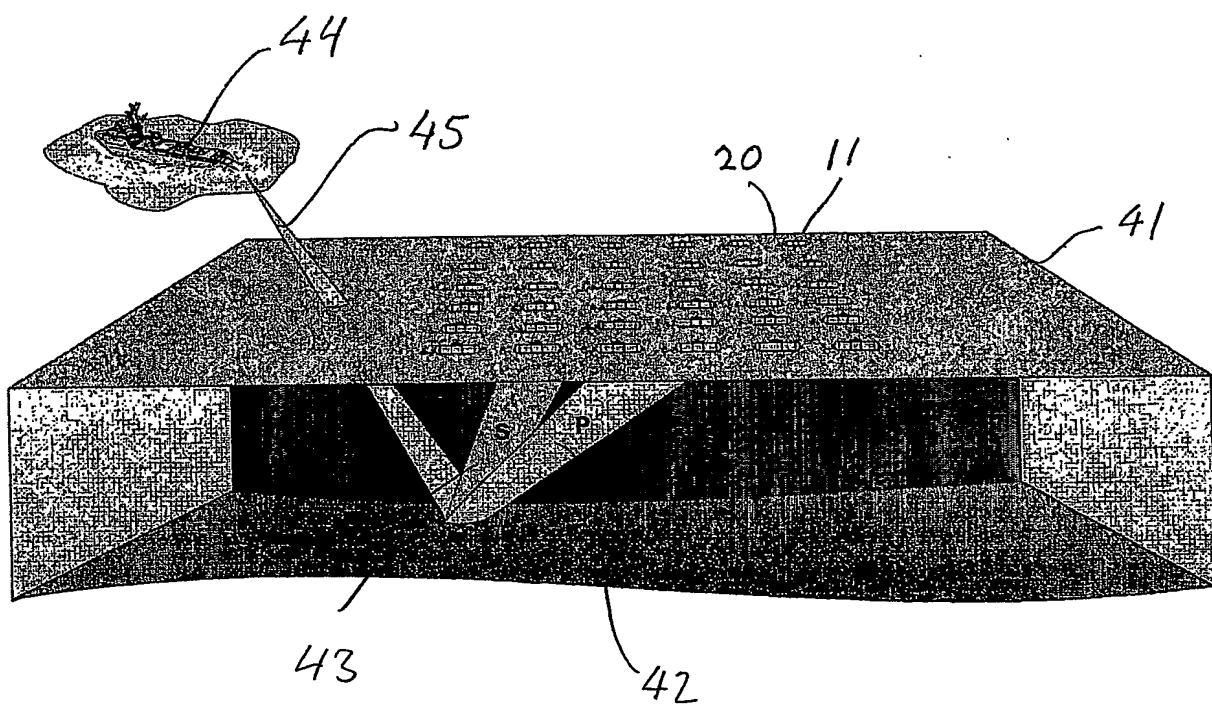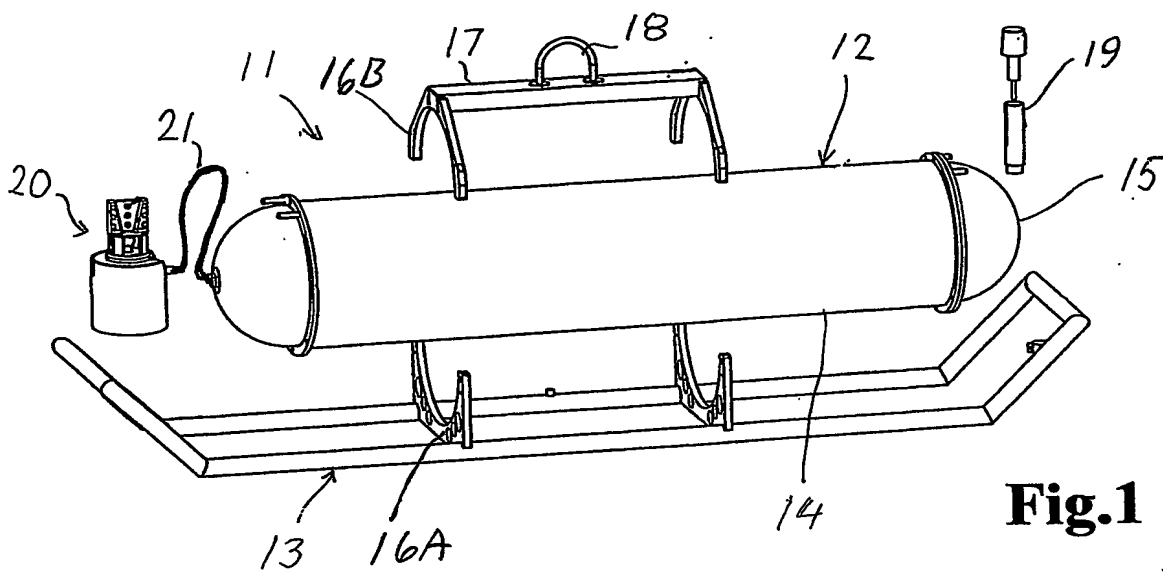**Fig.3**

2/2

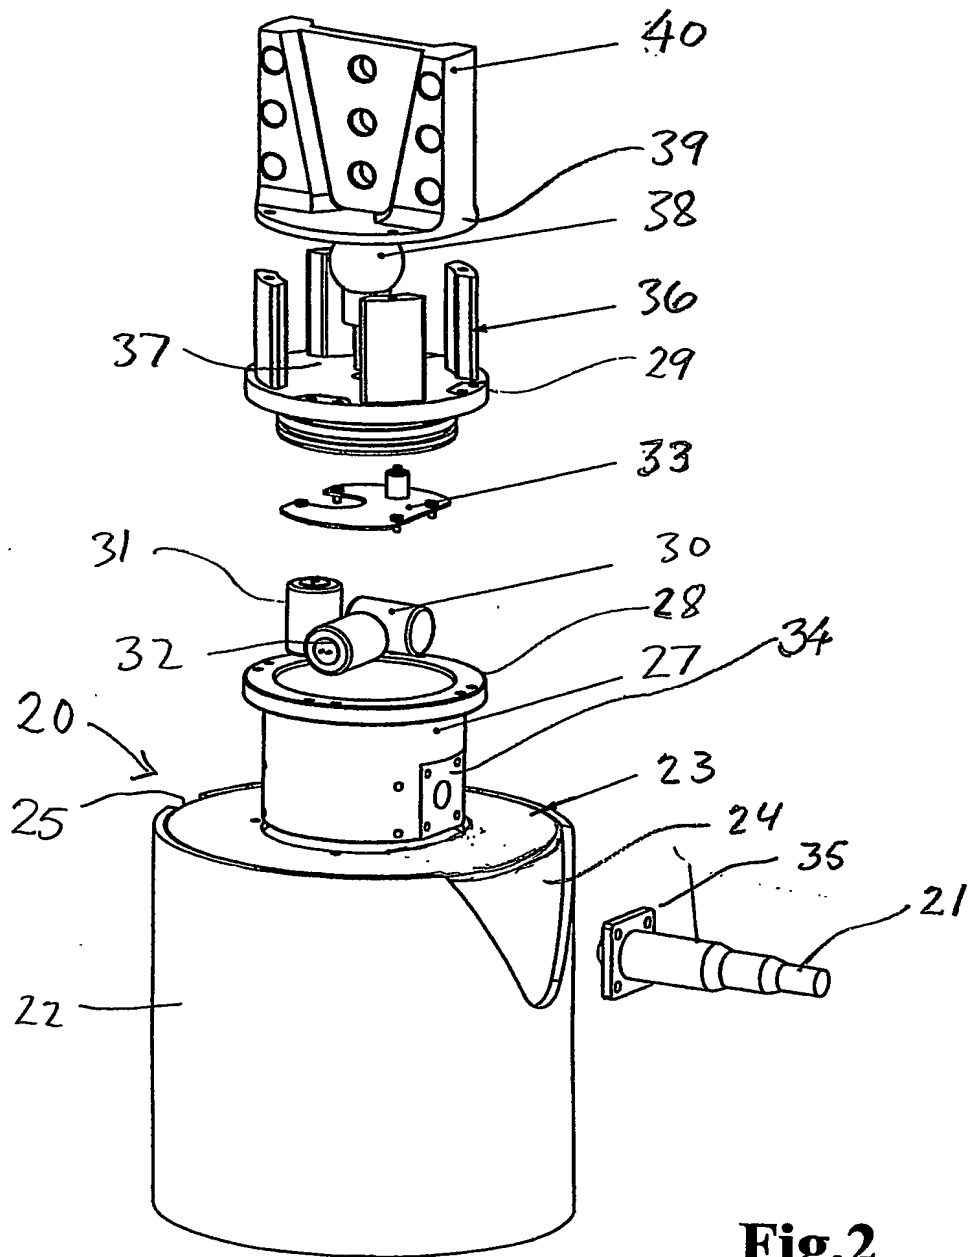


Fig.2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2003/000408

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G01V 1/16, G01V 1/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9106879 A1 (DEN NORSKE STATS OLJESELSKAP A.S.), 16 May 1991 (16.05.1991), page 3, line 4 - page 5, line 24, figure 2, abstract --	1-11
X	US 5253223 A (B.SVENNING ET AL), 12 October 1993 (12.10.1993), column 2, line 18 - column 3, line 13, figure 1 --	1-11
X	US 2002110048 A1 (ERIC VANDENBROUCKE), 15 August 2002 (15.08.2002), whole document --	1-12

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 February 2004

Date of mailing of the international search report

19-02-2004

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Gordana Ninkovic /itw
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/NO 2003/000408

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6474254 B1 (L.D.AMBS ET AL), 5 November 2002 (05.11.2002), column 3, line 22 - column 4, line 9, figure 1 --	12
X	US 5724241 A (G.WOOD ET AL), 3 March 1998 (03.03.1998), column 1, line 16 - line 17; column 4, line 50 - column 5, line 17, abstract --	12
A	US 4134097 A (C.S.COWLES), 9 January 1979 (09.01.1979), column 2, line 17 - line 60 --	1-12
A	US 4300220 A (D.D.GOFF ET AL), 10 November 1981 (10.11.1981), column 3, line 52 - line 64 --	1-12
A	US 4870625 A (D.R.YOUNG), 26 Sept 1989 (26.09.1989), abstract -- -----	1-12

INTERNATIONAL SEARCH REPORT

information on patent family members

International application No.

24/12/2003

PCT/NO 2003/000408

WO	9106879	A1	16/05/1991	AT	117808	T	15/02/1995
				AU	6606290	A	31/05/1991
				BR	9007782	A	21/07/1992
				CA	2072107	A,C	27/04/1991
				DE	69016452	D,T	14/06/1995
				DK	497815	T	10/04/1995
				EP	0497815	A,B	12/08/1992
				SE	0497815	T3	
				ES	2067769	T	01/04/1995
				GR	3015155	T	31/05/1995
				JP	3027004	B	27/03/2000
				JP	5501303	T	11/03/1993
				NO	168611	B,C	02/12/1991
				NO	894263	A	29/04/1991
				NO	921586	A	24/04/1992
				US	5442590	A	15/08/1995
<hr/>							
US	5253223	A	12/10/1993	AT	125954	T	15/08/1995
				AU	6603290	A	31/05/1991
				BR	9007781	A	21/07/1992
				CA	2072098	A,C	27/04/1991
				DE	69021398	D	00/00/0000
				DK	570364	T	25/09/1995
				EP	0570364	A,B	24/11/1993
				GR	3017879	T	31/01/1996
				JP	3027003	B	27/03/2000
				JP	5501302	T	11/03/1993
				NO	168557	B,C	25/11/1991
				NO	302543	B	16/03/1998
				NO	894262	A	29/04/1991
				NO	921587	A	24/04/1992
				WO	9106878	A	16/05/1991
<hr/>							
US	2002110048	A1	15/08/2002	CA	2364190	A	15/06/2002
				EP	1217390	A	26/06/2002
				FR	2818388	A,B	21/06/2002
				NO	20016103	A	17/06/2002
				US	6625083	B	23/09/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

24/12/2003

International application No.

PCT/NO 2003/000408

US	6474254	B1	05/11/2002	AU	5300401	A	08/10/2001
				BR	0109897	A	03/06/2003
				CA	2402837	A	04/10/2001
				GB	0222790	D	00/00/0000
				GB	2376444	A,B	18/12/2002
				NO	20024691	A	30/09/2002
				WO	0173477	A	04/10/2001
				AU	764545	B	21/08/2003
				AU	4692000	A	17/11/2000
				CA	2370310	A	09/11/2000
				EP	1177462	A	06/02/2002
				NO	20015231	A	20/12/2001
				US	6285956	B	04/09/2001
				US	6590831	B	08/07/2003
				WO	0067046	A	09/11/2000
				AU	760078	B	08/05/2003
				AU	2202199	A	19/07/1999
				BR	9814603	A	23/10/2001
				CA	2315854	A	08/07/1999
				EP	1047958	A	02/11/2000
				NO	20003295	A	30/08/2000
				US	6028817	A	22/02/2000
				WO	9934238	A	08/07/1999

US	5724241	A	03/03/1998	NONE
----	---------	---	------------	------

US	4134097	A	09/01/1979	CA	1095160	A	03/02/1981
				GB	1584503	A	11/02/1981

US	4300220	A	10/11/1981	NONE
----	---------	---	------------	------

US	4870625	A	26/09/1989	NONE
----	---------	---	------------	------
